



PK EVENT SERVICES / TOURING / SOUND

511 36TH AVENUE SE - CALGARY, AB. T2G 1W5

P: 403.452.6004 F: 403.452.6024

E: SALES@PKSOUND.CA

WWW.PKSOUND.CA

## PK-VX12

LARGE FORMAT CURVILINEAR ARRAY

PK's V12, advanced, isophasic, linear array is a high output, 1900watt, three-way cabinet with 100° horizontal coverage. Suitable for ballrooms, theaters, nightclubs, concert halls and large outdoor festivals, the V12 is a versatile speaker system with exceptionally easy to use rigging. 4-8 cabinets can be hung quickly and angled independently from 0° to 10°.


The high-frequency section consists of three 1.4" neodymium compression drivers, mounted on isophasic wave guides. This device produces the ideal linear source needed for excellent line array performance, and facilitates the enclosure's wide horizontal coverage.

The V12 enclosure is constructed from 13 ply, void free Baltic birch covered in Linex coating for a superior long lasting finish. Heavy gauge steel grills, side and rear handholds and an optional road case complete the robust package.



### SPECIFICATIONS

System Power Handling (Continuous / Peak)	1900 / 3800 Watts
Frequency Response (+/- 3db)	90 - 20000Hz
Sensitivity 1W/1m (Midbass / Mid / HF)	103 / 106 / 114.9 db
Max SPL / 1m (Calc) Full Space	143 db
Coverage Vertical (nominal -6db) H°	5°
Coverage Horizontal (nominal -6db) V°	100°
Nominal Impedance Midbass	8 ohms
Nominal Impedance Midrange	32 ohms
Nominal Impedance HF/Midrange	24 ohms
Midbass Power Handling (Continuous / Peak)	1200 / 2400 Watts
Midrange Power Handling (Continuous / Peak)	450 / 900 Watts
HF Power Handling (Continuous / Peak)	250 / 500 Watts
Recommended Crossover (Midbass/HF)	90 / 560 / 1200 Hz
Input Connections	Dual Speakon NL8
Weight Net	67 kg (147lbs)
Dimensions HxWxD	16.25" x 48.5" x 22.5"

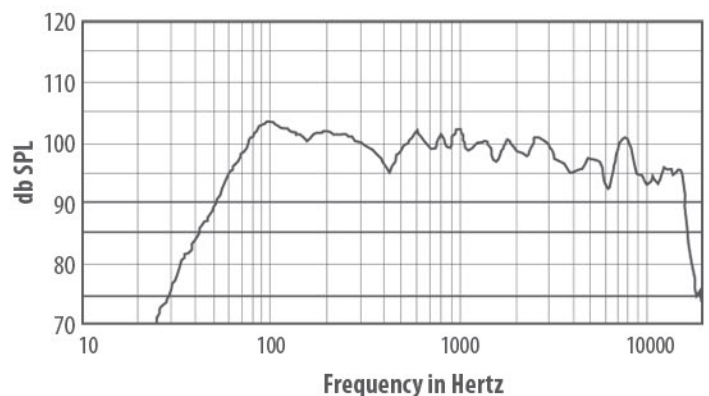

PK-VX12 - LARGE FORMAT CURVILINEAR ARRAY

WWW.PKSOUND.CA